


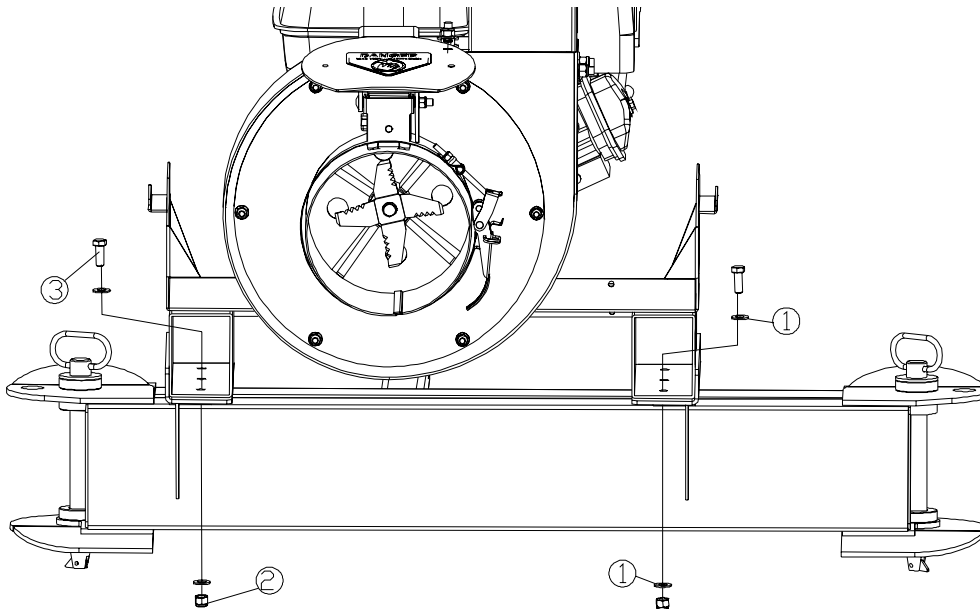



SAH34 BGI SWING AWAY HITCH*For DL Truck Loaders*

Purpose: To allow easy unloading of a truck by swinging the loader out of the way. It allows the operator to reach further from the side of the truck when locked in 90° position.

-  **DO NOT** remove both pins simultaneously.
-  **ALWAYS** transport with swing away hitch in closed position.
-  **USE ONLY** with hitch rated class III or better.

**INSTALLATION of DL on Swing Away Hitch**


Attach the DL to the Swing Away Hitch using the hardware provided (items 1-3)

Parts Bag Assembly

①

Washer 3/8" FC
8171004 Qty. 12

②

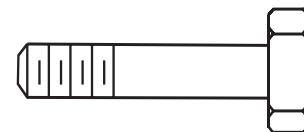Nut Lock 3/8"-16
8160003 Qty. 6

③

SCREW CAP 3/8-16
x 1" 8041050
Qty. 6



1803 S.W. Jefferson street
 Lee's Summit, Mo. 64082 / USA
 (816) 524-9666 FAX (816) 524-6983

SAH34 BGI SWING AWAY HITCH For DL Truck Loaders

OPERATION




Normal operating position / Transport position
NOTE: Do not transport with the hose in place.

To access the tailgate, remove the left pivot pin and rotate the arm with the loader and lock in place using the left pivot pin.




For easy curb side pick up, lock in place at 90° to right or left sides.


REFERENCE PARTS

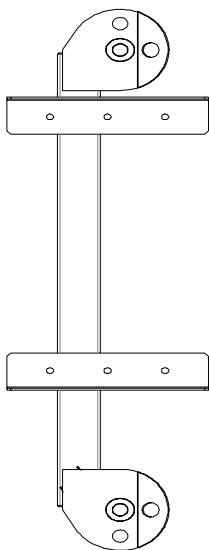

812290
 HITCH PIVOT
 SAH ASSEMBLY
 (QTY 1)

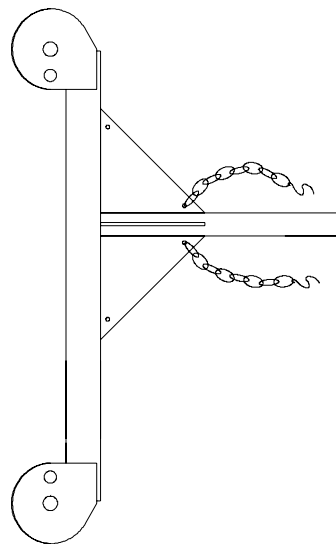


811162
 HITCH TONGUE
 SAH ASSEMBLY
 (QTY 1)

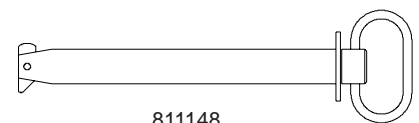

811148
 PIN TENSION
 LOCK 1X8
 (QTY 2)



811168
 BENT ARM PIN
 5/8 - 3
 (QTY 1)



811169
 HAIR SPRING
 COTTER PIN
 5/8 - 3/4
 (QTY 1)