




440140 PARKING BRAKE KIT

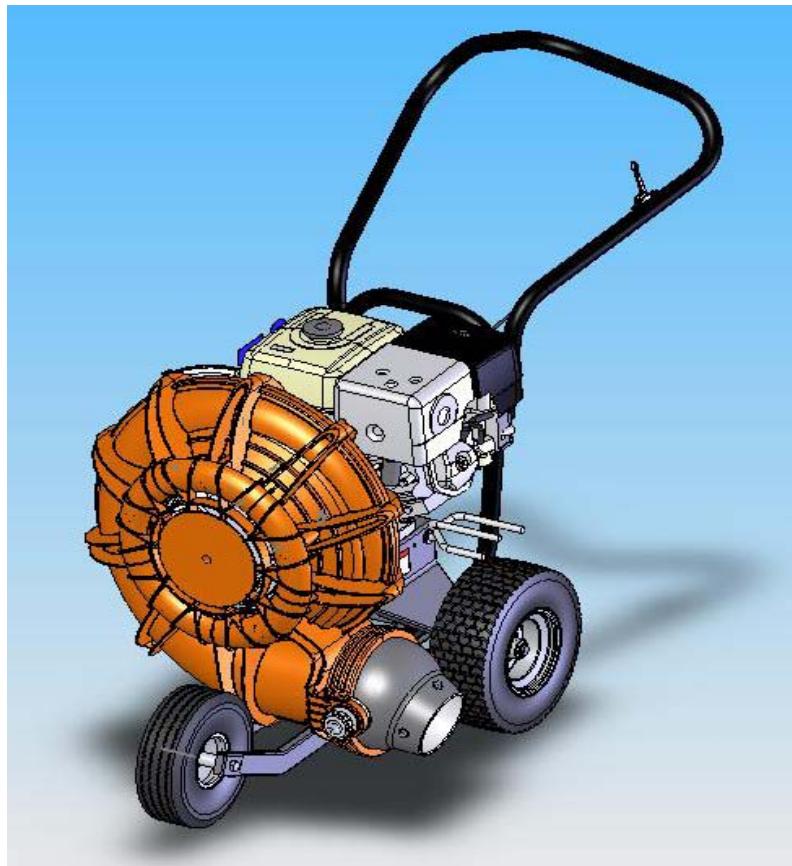

BILLY GOAT FORCE BLOWER Parking Brake Manual

PARKING BRAKE
<i>Effective and Easy to use.</i>

P/N 440140




440140 PARKING BRAKE KIT

ASSEMBLY

To install parking brake, first install the bushings (item #3) into the rear holes located on the base next to the rear wheels (see figure below). Next place two washers (item #2) on the fork shaft, against the stop washer. Then gently push shaft through the bushings and hole until it rests against stop washer. Finally place two washers (item 2) and a pal nut (item #4) on opposing end. To install stop bolt, place washer face nut (item #6) on screwcap (item #5) until nut reaches the end of the threads. Next insert the screwcap into the hole located in front of the brake and use second washer face nut (item #6) on the interior and tighten it.

NOTE: For older model frames (square front forks) you will need to drill the hole for the screw (item 5) to 5/16" and only use one washer (item 2) on the same side as the brake lever.

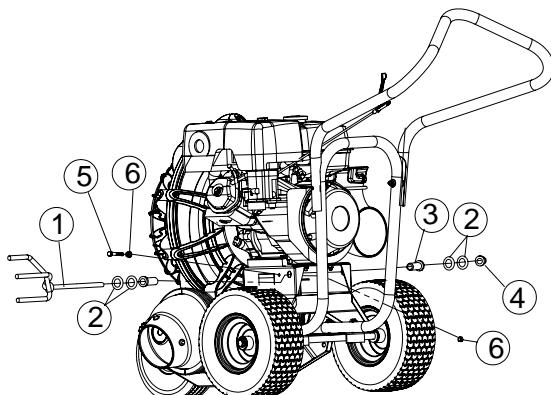

Parts List

Part No.	Description	Qty
1	440143 ROD BRAKE WA	1
2	8172011 WASHER 1/2 SAE	4
3	500130 BUSHING SHIFTER	2
4	840089 NUT PAL 1/2	1
5	8041036 SCREWCAP 5/16"-18 X 3"	1
6	350346 NUT 5/16"-18 SER. HX WASHER	2
440140	PARKING BRAKE KIT	1

To apply parking brake, simply rotate forks to till they rest against the back end of the tire. Place once foot on top fork and gently put downward pressure on the fork while carefully pushing unit forward. The forward motion of the tire will help to roll the forks into a fixed position. To remove from braking position pull unit backwards rotating the tire, which will rotate the forks away from locked position on wheel.

